## The Hong Kong Council of Social Service

## Tender Invitation – Supply and Install window-type air conditioner at Yip Shing Street Modular Social Housing Project

## **Tender Addendum**

RFP Ref. No:	SH/2022/002
<b>Invitation for tender:</b>	Request for Proposal on Supply and install
	window-type air conditioner at Yip Shing Street
	Modular Social Housing Project
<b>Date of Invitation to Tender:</b>	15 August 2022
<b>Closing Date &amp; Time:</b>	30 August 2022 (Tuesday) 5pm
<b>Proposal submission address:</b>	The Hong Kong Council of Social Service
	(HKCSS)
	The Tender Box, 13/F, Duke of Windsor Social
	Service Building, 15 Hennessy Road, Wan Chai,
	Hong Kong

1. The size of air conditioner installation: (Please refer to Figure 1&2) 363mm (H) x 480mm (W) x 640mm (D)



Figure 1



Figure 2

- 2. It is required to connect the AC unit power cord to the connection unit. (Please refer to Figure 3)
- 3. The power point is adjacent to AC unit and is within 1000mm(approx.) in distance. (Please refer to Figure 3)



Figure 3

4. Condensate water shall be connected to condensate drain pipe at external wall. (Please refer to Figure 4)

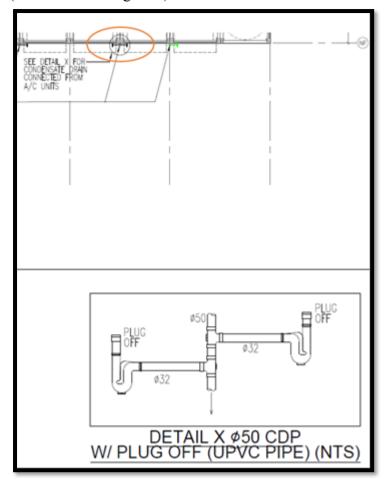


Figure 4

5. The size of the aluminum plate to replace canvas is similar to the air conditioner size: 363mm (H) x 480mm (W)